


Fluid level, automatic transmission

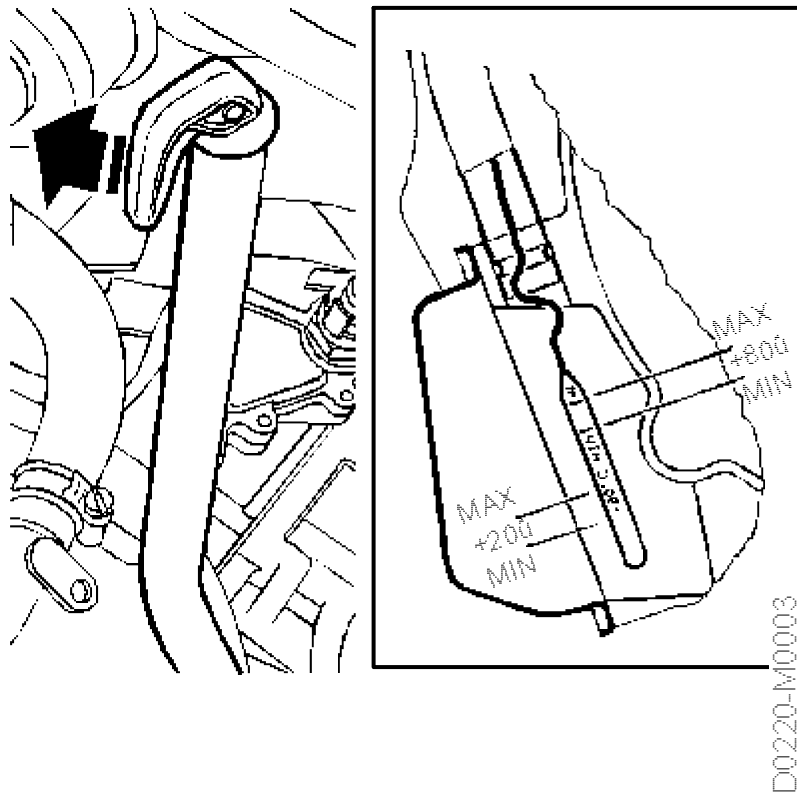

Warning

Keep the footbrake depressed

Apply the handbrake. Start the engine and run it at idling speed. Select D and wait at least 15 seconds. Then select R and wait another 15 seconds. Repeat in position P.

Check the fluid level (engine running at idling speed and selector lever in P). Top up as necessary.

Pay attention to the appearance of the fluid and its odour. If it is turbid or discoloured and or smells burnt, a change of fluid is advisable even if no complaints have been made about poorer shifting performance or excessive noise.

Important

The dipstick has two sets of level marks, one set for hot oil and one for cold oil. The amount of fluid between the maximum and minimum marks is about 0.4 litres (0.4 qts).

Oil type:

Automatic transmission fluid Texaco Texamatic Dexron III (mineral based) (7045 EU, TL 1863 US).